



► **Braskem solution for shrink films**

Now with superior clarity and gloss

Braskem

► Shrink Films

Braskem offers a broad portfolio of resins for shrink films with the capacity to meet the application's stringent performance requirements.


In addition to the important HDPE and LDPE resins, it also offers LLDPE resins, which are led by the families of metallocene polyethylene resins Braskem Flexus and Braskem Proxess, for formulations that surpass the performance expectations of Clients and end-users.



Solution's characteristics

The solution combines specific properties from the three families of Braskem LDPE, LLDPE and HDPE products.

The combination of these products ensures superior clarity and gloss and excellent mechanical and shrinkage properties with good compacting performance for packaging adopting the solution.

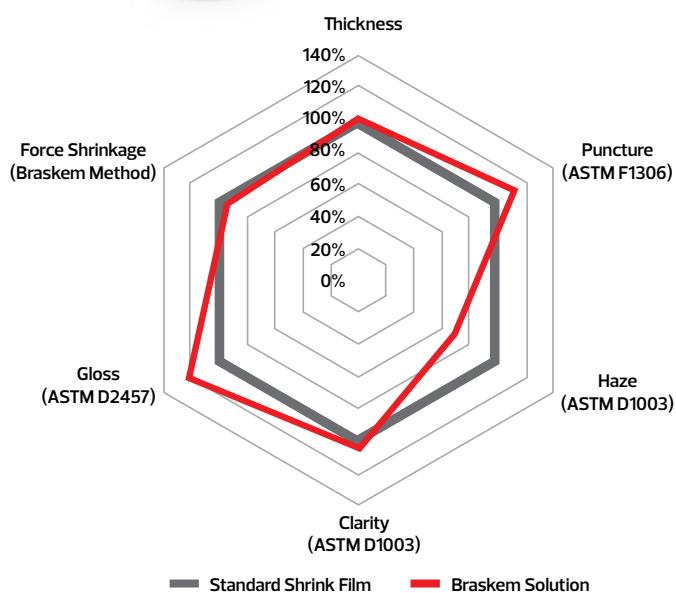

	ASTM Method	Unit	Braskem Flexus 9211	Braskem Proxess 2606	Braskem LDPE TS7006	Braskem HDPE HE150
Melt Flow Rate (190°C/2.16Kg)	ASTM D 1238	g/10min	1,0	0,6	0,6	1,0
Density	ASTM D 1505	g/cm ³	0,917	0,926	0,925	0,948

Braskem Multilayer Collation Shrink Film Solution

